




ZE1201-ND4

ELONGATED BARREL FITTING 38 [965]
EZCARRY® ADJUSTABLE HORIZONTAL HIGH PERFORMANCE
SIPHON JET NO-HUB WATER CLOSET CARRIER SYSTEM

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

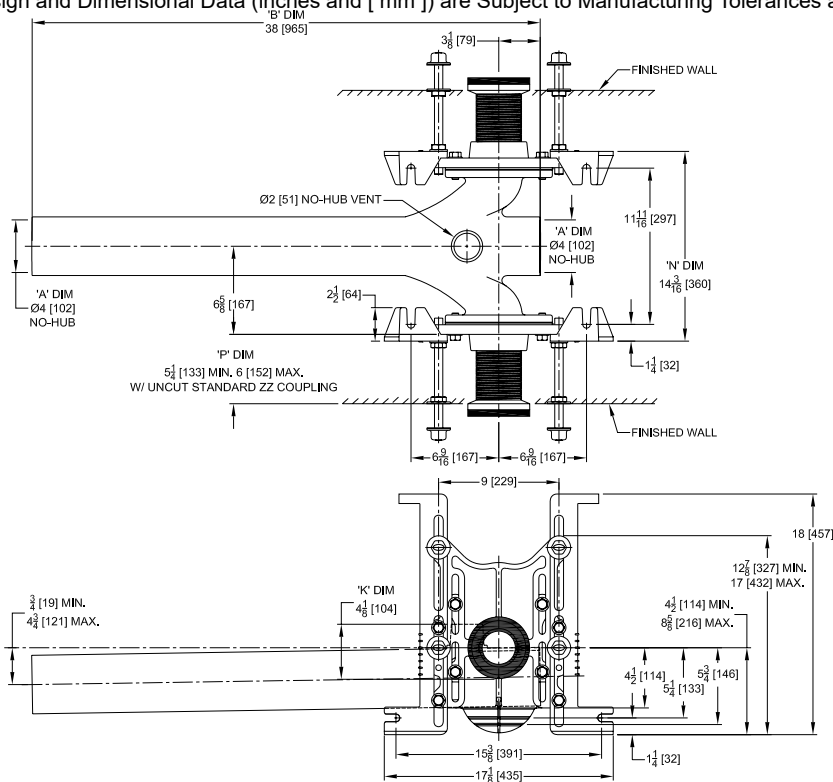

Product Number	Approx. Wt. lbs [kg]
ZE1201-ND4	122 [55]

Note:

- Z coupling, Min. 'P' Dim. Obtainable=2 [51]. EZ-Set™ Coupling, Min. 'P' Dim. Obtainable=4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT.
- Feet bolted to floor using min. 1/2 [13] dia. anchors.

ZE1201-ND4 Illustrated

ENGINEERING SPECIFICATION: ZURN ZE1201-ND4

EZCarry® horizontal siphon jet water closet carrier system, with high performance Dura-Coated cast iron main fitting with hydro-mechanically optimized sweeps, 4" [102 mm] no-hub connections, 38" [965 mm] barrel for stall to stall direct connection, and extended 2" [51 mm] vent. Corrosion resistant, adjustable 3" [76 mm] dia. X 6" [152 mm] couplings with integral test caps, designed to increase flow velocity and line carry, and labor saving "Neo-Seal" bonded gaskets optimize flow performance while reducing installation steps. Complete system includes adjustable faceplates, QuickFit™ faceplate gaskets, floor mounted pre-fab slotted foot supports with top anchoring pre-fab support base; fixture bolts, trim, and stud protectors. EZCarry® system complies with all applicable requirements of ASME A112.6.1M up to a 500 lbs [227 kg] maximum static load.

OPTIONS (Check/specify appropriate options)

___ ZE1201-ND4 4 [102] No-Hub Back-to-Back Inlet (Double)

PREFIXES

- ___ ZE D.C.C.I. System with Zurn ZZ Adjustable Coupling*
- ___ ZQE D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

- | | |
|--|--|
| ___-A Auxiliary Support Assembly | ___-F Floor Mounted, Back Outlet Fixture Support |
| ___-CC Corrosion Resistant Cast Iron Coupling (2-1/4 to 12 [57 to 305]) | ___-G Galvanized Cast Iron |
| ___-CE EZ-Set™ Coupling (NPSM 6 [152] , 12 [305] or custom) (NPT 12 [305] or custom) | ___-M Auxiliary Foot Support (for 'P' Dim. 7 thru 18 [178 thru 457]) |
| ___-CL Custom Length Standard Coupling with Integral Test Cap (Specify Length 4, 8, 10, 12 [102, 203, 254, 305]) | ___-RYK17 One Piece Unistrut Pre-Fab Foot |
| ___-CS 2-1/4 [57] Polymer Coupling with Integral Test Cap (ZZ Coupling Only) | ___-VP Vandal-Proof Trim |
| | ___-X2 2 [51] Carrier Foot Extension Assembly |
| | ___-X3 3 [76] Carrier Foot Extension Assembly |
| | ___-45 Finishing Frame for Siphon Jet System |
| | ___-50 Flush Valve Supply Support for Water Closets |

* Regularly furnished unless otherwise specified.

- ⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov
- ⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov
- ⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov