



S19-312

Combination Drench Shower and Eye/Face Wash Unit

Key Features

- Complies with American National Standard Z358.1
- Galvanized steel pipe and fittings with BradTect® safety yellow coated cast iron floor flange
- Combination units may be top-supplied or mid-supplied
- Universal Identification sign and inspection tag included
- Full, one-year warranty
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1
- SpinTec™ showerheads are covered by one or more of the following patents: 8113446; D594,089; D669,555; Reg. Comm. Des. D001079560-0001.
- Other patents pending.

Specifications

Combination Drench Shower and Eye/Face Wash Unit saves space and fits easily into any work environment. Shower valve operates quickly by a pull rod with a triangular handle. Shower provides a superior washdown with a more even spray pattern. Eye/face wash operated by a large, highly visible push handle. Safe, steady water flow under varying water supply conditions from 30–90 psi is assured by integral flow control in the sprayhead assembly. The ANSI Z358.1 standard requires an uninterrupted supply of flushing fluid at a minimum 30 psi flowing pressure. Eye/face wash sprayheads contain an antimicrobial agent to protect the sprayheads.




This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.

Standard Equipment

SpinTec™ Showerhead

Standard showerhead is 3.1" (78.7 mm) diameter highly visible yellow impact-resistant plastic. SpinTec drench showerhead features integral 22 gpm flow control, conserving water and helping to accurately size your tepid water system.

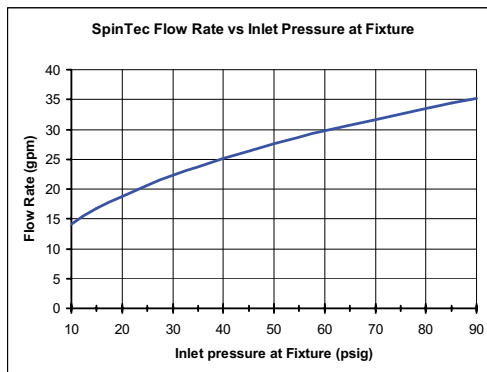

Eyewash Bowl

10" (254mm) diameter yellow impact-resistant plastic.

Standard Sprayhead Assembly

Twin perforated-disc eye/face wash heads with protective sprayhead covers, operated by a large, highly visible push handle. Safe, steady water flow under varying water supply conditions from 30–90 PSI is assured by integral flow control in the sprayhead assembly.

Shower Valve

Chrome-plated brass 1" NPT stay-open ball valve. Operated by a stainless steel pull rod with triangular handle.



Eyewash Valve

Chrome-plated brass ½" NPT stay-open ball valve hand operated by highly visible safety yellow PVC push handle.

Pipe and Fittings

Galvanized steel pipe and fittings with BradTect® safety yellow coated cast iron floor flange.

Water Supply

1¼" NPT.

Product Compliance

- Classified by Underwriters Laboratory Inc., to ANSI Z358.1





Model	Description
S19-312	Drench Shower and Eye/Face Wash with Plastic Showerhead & Bowl

Tepid Water Options

[Navigator S19-2150 EFX20](#)
[Emergency Thermostatic Mixing Valve](#)

[Keltech SNA-Series](#)
[Tankless Water Heater](#)

NAVIGATOR



Satisfies ANSI/ISEA Z358.1 tepid water requirements.


© 2024 Bradley

S19-312


Combination Drench Shower and Eye/Face Wash Unit

Dimensions

(mm)

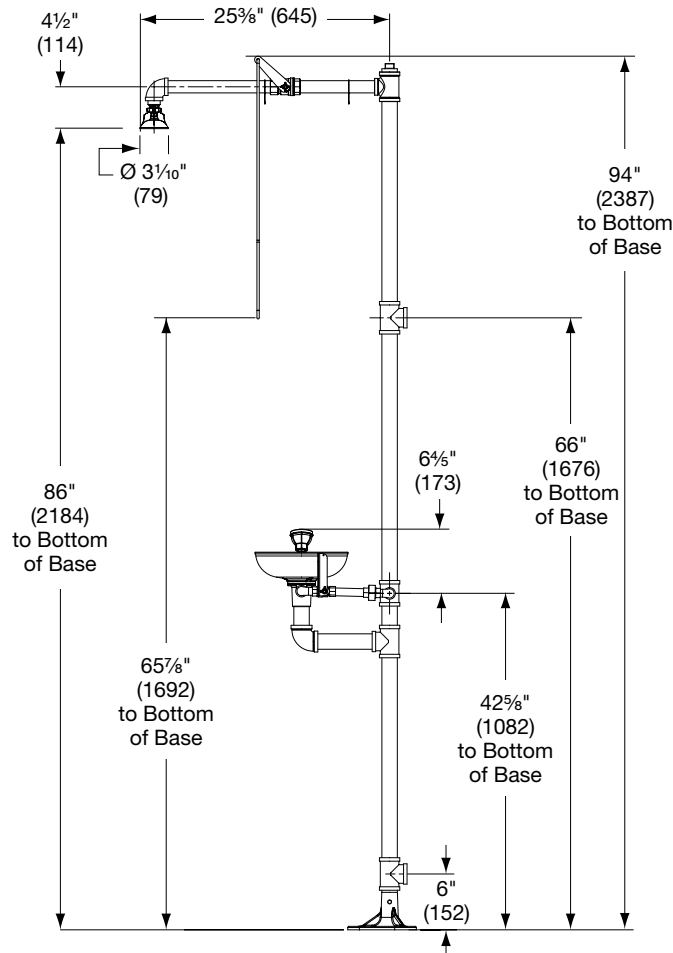

Top View From Bowl

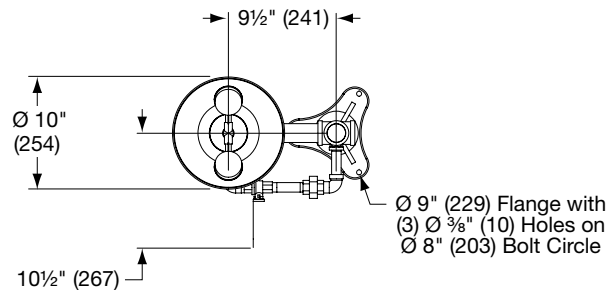

- ☒ Local codes may require the installation of a backflow prevention valve to complete proper installation. Compliance with local codes is the responsibility of the installer. Valve must be tested annually to verify that it is functioning properly. Backflow prevention valves are not included with the fixture and may be supplied by the contractor or purchased from Bradley Corporation.
- ☒ All dimensions assume standard thread engagement. Variations in manufacturing allow for +/- 1/8" (3mm) per threaded joint. To find the tolerance of a dimension, add the number of thread joints in between a dimension and multiply it by 1/8" (3mm).