



A WATTS Brand

S19370-SS, S19370-SSU


Enclosed Indoor Safety Shower with Tepid Water Inlet

- 300-series stainless steel construction
- Center drain system or multi-drain system
- Combination drench shower and eye/face wash are UL Certified to ANSI/ISEA Z358.1

Standard Equipment

Safety Shower and Eye/Face Wash

High performance Type 304 corrosion-resistant stainless steel showerhead measures 1½" (38 mm) in diameter. SpinTec™ drench showerhead features integral 22 gpm (83.3 Lpm) flow control (exceeds minimum water flow of 20 gpm (75.7 Lpm) at 30 psi (2.0 bar)), conserving water and provides equal distribution throughout the spray pattern providing a more effective wash down. Shower is activated by a stainless steel pull rod.

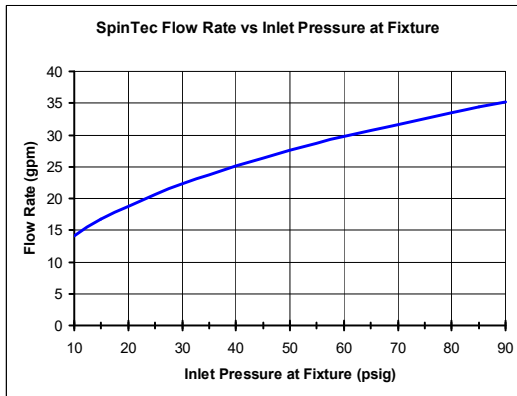

Bradley's drench shower and eye/face wash in all stainless steel provide additional protection from nature's elements.

The Halo eye/face wash system offers a high performance rinsing platform that provides rapid relief to an individual's eyes that have been injured by chemicals or particulates. The swing-down eye/face wash includes an integral 5.1 gpm (19.2 Lpm) flow control, providing water at a safe velocity while maintaining its effectiveness (exceeds minimum water flow of 3.0 gpm (11.4 Lpm) at 30 psi (2.0 bar)). The eye/face wash is protected by flip open dust covers that open when the product is activated. Safe, steady water flow under varying water supply conditions from 30–90 psi (2.0–6.1 bar) is assured by integral flow control in the sprayhead assembly.

Halo™ is covered by one or more of the following patents: 9,700,484; 9,314,398; D662220; D673298; D662605; D685920; D662219; and D671228. Other patents pending.

Inlet and Water Supply Pressure

Top, bottom, and recirculation system capable water inlets have a 1" NPT union connection; must be supplied with a minimum 30 psi (2.0 bar).

External

Stainless steel roof and walls to protect the enclosure from the degradation due to prolonged exposure to harsh chemicals. Exterior of shelter is 300-series stainless steel and includes safety decals directing the injured party to the entrance of the shower.

An antimicrobial, IFR polyester modesty curtain over the entrance of the shelter is included for additional privacy.

Internal



The shower area on the S19370-SS includes a sloped center drain below a proprietary removable stainless steel floor grate panel system that can be connected to external drain plumbing using a 4" NPT fitting. The shower area on the S19370-SSU includes a multi-drain system located below a proprietary removable stainless steel floor grate panel that features a 4" NPT bottom drain and 1.5" NPT drains on (3) side walls.

Product Compliance



UL Classified to ANSI/ISEA Z358.1

Model	Description
S19370-SS	Enclosed Indoor Safety Shower with Tepid Water Inlet and Center Drain System
S19370-SSU	Enclosed Indoor Safety Shower with Tepid Water Inlet and Multi-Drain System

© 2024 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com



A WATTS Brand

S19370-SS, S19370-SSU

Enclosed Indoor Safety Shower with Tepid Water Inlet

Tepid Water Inlet

System includes a 1" NPT union for a fast plumbed connection to a potable supply of tepid water 60–100°F (16–37°C). Tepid water is required per ANSI/ISEA Z358.1.



Refer to the separate technical drawing for S19370-SS at www.bradleycorp.com.

Job Name:

Location:

Revision Date:



A signed submittal drawing is required.
This submittal drawing will be provided upon receipt of order.

This is to acknowledge that the "End User" identified below has marked the boxes in the selection guide above to design an enclosure that will meet its site and specification requirements, and wishes to have Bradley custom-build that enclosure to its order, on the understanding that the order may not be canceled, the enclosure may not be returned and that no refund of any portion of the purchase price for the enclosure will be made (except under Bradley's warranty). It is also to acknowledge that the "Distributor" identified below is placing an order with Bradley for the enclosure, on the Terms and Conditions found on Bradley's website, at www.bradleycorp.com, again on the understanding that the order may not be canceled, the enclosure may not be returned and that no refund of any portion of the purchase price for the enclosure will be made (except under Bradley's warranty).

name of "End User"

by _____

title _____

date _____

name of "Distributor"

by _____

title _____

date _____

© 2024 Bradley